



**For Security  
Vari-Focal**

**MP<sup>3</sup>**  
MEGA  
PIXELS

**DV3.4×3.8SA-1**

Applicable camera (model)

1 2/3 1/2 1/3 1/4

**3.4×**



**New!**

**VARI**  
Vari-Focal

**WIDE**  
Wide Angle

**TELE**  
Telephoto  
Long Focal

**3 Mega**  
For Megapixel  
Camera

**MANUAL**  
Manual Iris


**C-mt**  
C Mount

**METAL**  
Metal Mount

**AT**  
Aspherical Lens

**F1.4**  
Wide Aperture Rate

- High image-quality monitoring with optical performance supporting 3 megapixels.
- Compatible with a wide range - 1/2", 1/3" and 1/4" - cameras.
- Wide f3.8-13mm range accommodates various applications.
- Designed to maximize optical performance with high-accuracy aspheric lens, low-dispersion glass, and high refractive-index glass.

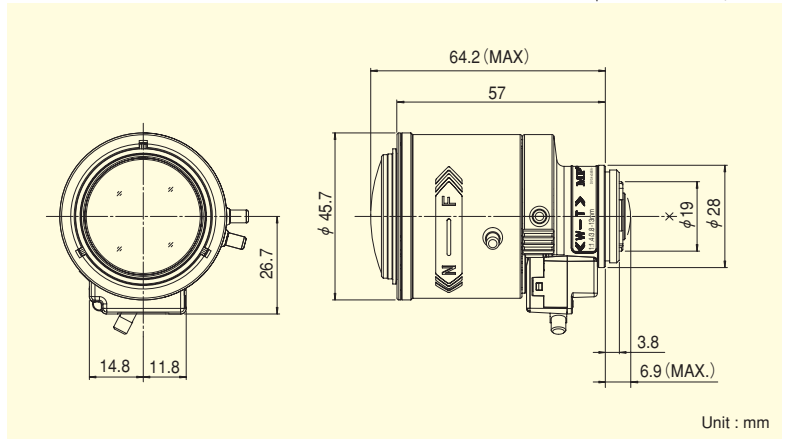

**MP<sup>3</sup>**  
MEGAPIXEL VARI-FOCAL LENSES

Focal Length (mm)		3.8~13 (3.4×)	
Iris Range		F1.4 ~ Close	
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Manual	
Angle Of View (H×V)	1/2"	WIDE	97°34' × 71°47'
		TELE	28°23' × 21°18'
	1/3"	WIDE	71°47' × 53°25'
		TELE	21°18' × 15°59'
	1/4"	WIDE	53°15' × 39°41'
		TELE	15°59' × 11°59'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.3	
Object Dimensions at M.O.D. (H×V) (mm)	1/2"	WIDE	715 × 452
		TELE	170 × 126
	1/3"	WIDE	452 × 313
		TELE	126 × 94
	1/4"	WIDE	313 × 225
		TELE	94 × 70
Back Focal Distance (in air) (mm)		10.60	
Exit Pupil Position (From Image Plane) (mm)		461	
Filter Thread (mm)		—	
Mount		C	
Mass (g)		80	
Remarks		• With Metal Mount	

[Lens Image]

