
## HZ35X1015V

Туре		AI ZOOM	Mount		С	1/2
Focal Length		10~350mm	Back Focus		14.48mm	
Fno.		F1.5	Mechanical Bf		17.53mm	
Designed Image Format		1/2"(4.8x6.4mm)	Exit Pupil		98.64mm	
	Iris	F1.5-F4.4	Filter Size		M86 P=1.0	
Operation Range	Focus	2.5m ~ infinity	Aperture	Front	Ø –	
	Zoom	10~350mm	Rear		Ø –	
Control	Iris	DC Motor	·			
	Focus	DC Motor	Dimension		112x100x249.5mm	C
	Zoom	DC Motor	Weight		1950 g	
Object Size at MOD	Wide	1496x 43.4mm				
	Tele	1121x 32.6mm				
Field of View	D	_	_			
	Н	1/2" 35.3°~1.05°	1/3" 26.7°~0.79° 20.1°~0.59°			
	V	26.7°~0.79°				
Control		Iris	Focus		Zoom	
Driving Coil/Supply Volt.		DC 6-12V	DC 6-12V		DC 6-12V	
Damping Coil/Current		60mA or less	60mA or less		60mA or less	
Response Time		about 3 sec.	about 14 sec.		about 7 sec.	
Potentiometer		_	_		_	
Light Measuring Method		Average to Peak(Factory set at Average)				
Input Signal		Video Signal (V or VS)				
Iris Accuracy		±15% at Video Signal Level				
Sensitivity Adjustme		0.4~1.0Vp-p(Video Signal)				
Operating Temperature		−10 ~ +50 degree C				

## **DIMENSIONS**

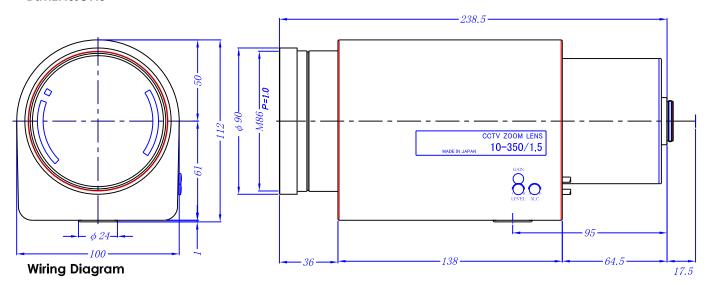

## 1) 3-core Cable for Auto Iris

,, 5 core cobre ror maro .						
RED	+ 12 V					
WHITE	Video					
BLACK	GND					

## 2) 4-core Cable for Focus / Zoom Control

Black	Focus	(+)	Far to Near	(-)	Near to Far
Green	Focus	(-)	Far to Near	(+)	Near to Far
Yellow	Zoom	(+)	Wide to Tele	(-)	Tele to Wide
Red	Zoom	(-)	Wide to Tele	(+)	Tele to Wide