

## GC780



### Description

#### Low cost GigE camera - 64 fps

The GC780 is an ultra-compact, economically priced, machine vision camera with Gigabit Ethernet interface. The GC780 incorporates the Sony ICX415 CCD sensor and runs 64 frames per second at 782x582 resolution over the GigE Vision® compliant Gigabit Ethernet interface.

- 1/2" Sony ICX415 Progressive Scan CCD
- 64 fps at 782x582
- **Models:**
  - GC780, 782x582, 64 fps, CCD, mono
  - GC780C, 782x582, 64 fps, CCD, color



Important information: [Prosilica GC Power Voltage Specification Update](#)

## Specifications

<b>Prosilica GC</b>		<b>780</b>
<b>Interface</b>	IEEE 802.3 1000baseT	
<b>Resolution</b>	782 x 582	
<b>Sensor</b>	Sony ICX415	
<b>Sensor type</b>	CCD Progressive	
<b>Sensor size</b>	Type 1/2	
<b>Cell size</b>	8.3 $\mu\text{m}$	
<b>Lens mount</b>	C	
<b>Max frame rate at full resolution</b>	64 fps	
<b>A/D</b>	12 bit	
<b>On-board FIFO</b>	16 MB	
<b>Output</b>		
<b>Bit depth</b>	8/12 bit	
<b>Mono modes</b>	Mono8, Mono12Packed, Mono16	
<b>Color modes YUV</b>	YUV411, YUV422, YUV444	
<b>Color modes RGB</b>	RGB24, BGR24, RGBA24, BGRA24	
<b>Raw modes</b>	Bayer8, Bayer12Packed, Bayer16	
<b>General purpose inputs/outputs (GPIOs)</b>		
<b>TTL I/Os</b>	1 input, 1 output	
<b>Opto-coupled I/Os</b>	1 input, 1 output	
<b>RS-232</b>	1	
<b>Operating conditions/Dimensions</b>		
<b>Power requirements (DC)</b>	5-16 V*	
<b>Power consumption (12 V)</b>	2.8 W	
<b>Mass</b>	100 g	
<b>Body Dimensions (L x W x H in mm)</b>	59x46x33 including connectors, w/o tripod and lens	
<b>Regulations</b>	CE, FCC, Class A, RoHS	

\* Cameras shipped after April 1, 2011 support 5-25 VDC. Please review the [Prosilica GC Power Voltage Specification Update](#) for further information.

[Download Prosilica GC780 technical drawing \(click here\)](#)

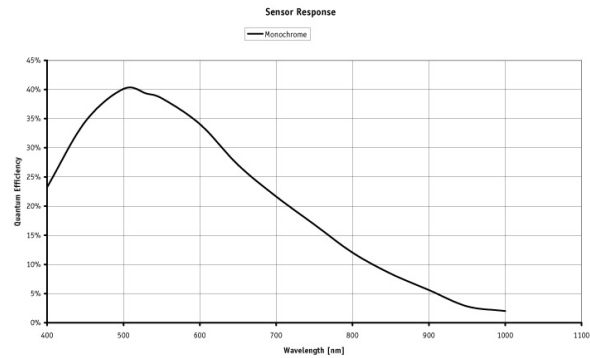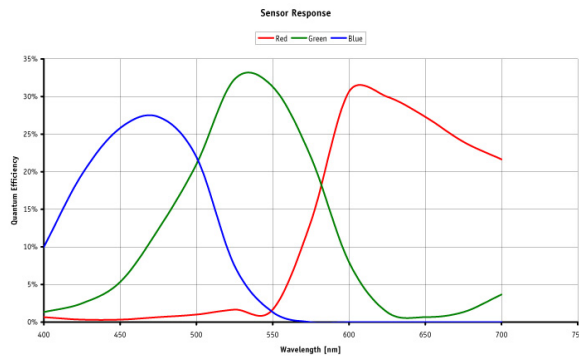

## Smart features

The GC780 features include:

- Auto Exposure
- Auto Gain
- Auto White balance
- Flexible Binning
- Region of Interest readout (AOI partial scan)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Global shutter (digital shutter)
- Recorder and Multiframe Acquisition Modes

## **Applications**

The GC780 is ideal for a wide range of applications including:

- industrial inspection
- machine vision
- optical character recognition
- traffic imaging
- robotics
- OEM applications