
## H10Z0812AMSP-2

10X 8~80 mm F1.2 for 1/2"format cameras C-Mount

With Preset

| Model No.              |       | H10Z0812A   | MSD-2     | Effective          | Front | φ 54.0 mm              |
|------------------------|-------|---|-----------|--------------------|-------|------------------------|
| Focal Length           |       | 8~80mm  |           | Lens Aperture      | Rear  | φ 14.0mm               |
| Max. Aperture Ratio    |       | 1:1.2   |           |                    |       | 15.3 mm                |
|                        |       |   |           | Back Focal Length  |       |                        |
| Max. Image Format      |       | 6.4 x 4.8mm (φ8mm)  |           | Flange Back Length |       | 17.526 mm              |
|                        | Iris  | F1.2 ~ 560  |           | Mount              |       | C-Mount                |
| Operation Range        | Focus | 1.5m <b>∼</b> Inf.  |           | Filter Size        |       | M62 P=0.75 mm          |
|                        | Zoom  | 8~80mm  |           | Tripod Screw       |       | 1/4"-20UNC             |
| Control                | Iris  | Auto Iris(by galvanometer)  |           | Dimensions         |       | W70 x H79.5 x D123.5mm |
|                        | Focus | Motorized,Preset  |           | Weight             |       | 680g                   |
|                        | Zoom  | Motorized,Preset  |           |                    |       |                        |
| Object Dimension       | 8mm   | 124.8 x 92.5cm  |           |                    |       |                        |
| at M.O.D.              | 80mm  | 17.6 x 14.4cm   |           |                    |       |                        |
| Angle of View          | D     |   | 54.3~5.8° |                    |       |                        |
|                        | Н     | 1/2″  | 44.0~4.7° | =                  |       |                        |
|                        | ٧     | -   | 33.3~3.5° | -                  |       |                        |
| Control                |       | Iris  |           | Focus              |       | Zoom                   |
| Supply Voltage         |       | DC8.5 ~ 16V   |           | DC8V               |       | DC8V                   |
| Current                |       | 40mA or less  |           | 45mA or less       |       | 50mA or less           |
| Response Time          |       | Approx. 2 sec.  |           | Approx. 5.5        | sec.  | Approx. 5.5 sec.       |
| Preset Potentiometer   |       | _   |           | 5KΩVF              | ₹     | 5KΩVR                  |
| Light Weighting Method |       | Adjustable between Average - Peak ( to be set at Average at factory ) |           |                    |       |                        |
| Remote Control         |       | Level (VL 1.5 - 5.5V) & ALC(VA 4.0 - 5.5V)                            |           |                    |       |                        |
| Input Signal           |       | Video Signal ( V or VS )  |           |                    |       |                        |
| Iris Accurancy         |       | ± 15% at Video Signal Level   |           |                    |       |                        |
| Sensitivity Adjustment |       | 0.5∼1.0Vp−p ( Video Signal )  |           |                    |       |                        |
| Input Impedance        |       | High Impedance  |           |                    |       |                        |
| Operating Tempera      | ture  | -10 ∼ +50° C  |           |                    |       |                        |

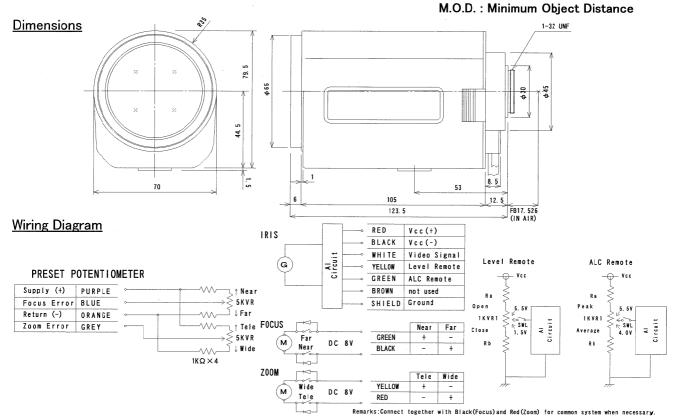

С

1/2

ZA