


① IRIS CABLE

(+)	RED	INPUT VOLTAGE
(-)	BLACK	GROUND
	WHITE	VIDEO SIGNAL
	GREEN	REMOTE CONTROL

② MOTOR CABLE

(+)	GREEN	FOCUS NEAR
(+)	BLACK	FOCUS FAR
(+)	YELLOW	ZOOM IN
(+)	RED	ZOOM OUT

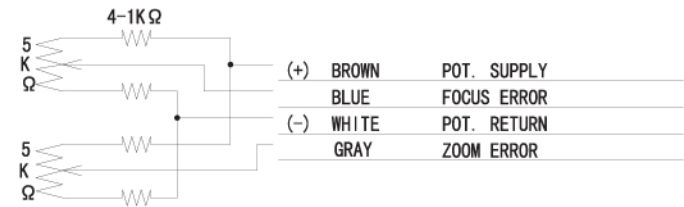


SPECIFICATION

1. USE	FOR 1/2" COLOR, B/W CAMERA		
2. FOCAL LENGTH	f=11 ~ 200 mm		
3. IRIS RANGE	F=1.9 ~ 360 ~ CLOSE		
4. IMAGE SIZE	φ8 (4.8x6.4)		
5. BACK FOCAL LENGTH	10.21 mm in air		
6. FLANGE FOCAL LENGTH	17.526 mm in air		
7. FOCUS RANGE	∞ ~ 1.5 m		
8. FIELD ANGLE	DIA.	(W)	39.7 °
	HOL.		2.3 °
	VER.		32.1 °
9. FIELD OF VIEW AT W.O.D.	DIA.		1001 mm
	HOL.		802 mm
	VER.		601 mm
10. DISTORTION	TV		-0.6 %
11. LENS CONSTRUCTION	12 GROUPS 16 ELEMENTS		
12. CLEAR APERTURE	FRONT	φ58.0	REAR φ14.7
13. EXIT PUPIL POSITION	+55.9 mm (format)		
14. WEIGHT	860 g (880 g)		

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190 Ω (20° C)
	COLOR	RED (+) 4pin BLACK 3pin
BRAKE COIL	RESISTOR	1150 Ω (20° C)
	COLOR	YELLOW (+) 2pin GREEN 1pin
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V W/CLOSING SPRING



AUTO IRIS
1/2" 1.9/11-200mm
LMZ112AMP
LMZ112AMPDC